

# INCLINED DISPENSER CAROUSEL

HIGH CAPACITY, ERGONOMICALLY DESIGNED  
CATERPILLAR DRIVEN, SLOPE-FACED CAROUSEL

## Ideal for remote feed

Robust, heavy-duty, sloped design - ideal for remote feed situations




## Versatile

Suitable for either reclaim or make-up applications

## Fast and efficient

Modular design for ease of installation

## SPECIFICATIONS

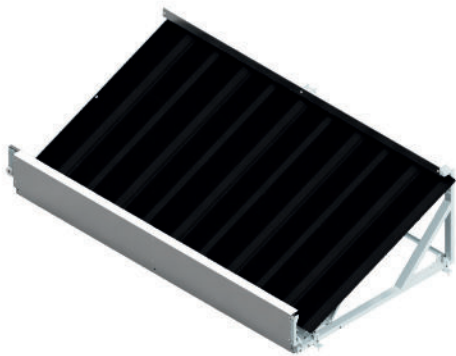

Constructed on a modular track, the articulating flites are mounted on connected carriages forming a continuous rotating sloped surface. The carriages are driven by a reliable caterpillar drive system. The modular design and construction allows for ease of installation and reconfiguration.

Inclined dispensers can be arranged to receive baggage from feed conveyors at a point on the inside trim. The unit can be automatically fed via belt conveyors and operated continuously at 30 meters per minute.

The public-side is finished with stainless steel trim and the airside with galvanised steel trim. Flites area available in PA6 or stainless steel.

## DIMENSIONS

REFERENCE	DESCRIPTION	STANDARD
A	Moving width	1600mm (nominal)
B	Overall width	1900mm
C	Floor to trim height	385mm
D	Chain line radius	2475mm
	Flite incline angle degrees	22.5 degrees

## DRAWINGS

